

Laser Beam Expanders | LBEL

RoHS

Application Systems

Machine Vision

Manual Positions

Motion Control Products

Optical & Mirror Holder

FA Parts

Measurement & Control

FA Electrical Parts

Tool & Measure

Cleanroom & AntiStatic

Index

Mirrors

Beamsplitters

Filters

Polarizers

Lenses

Multi-Element Optics

Prisms

Substrates & Windows


Holder & Vibration Isolator

Beam expanders are useful laser accessories when the beam diameter must be increased. However, their main function is in decreasing the divergence of the laser beams which are to be projected over long distances. These precision beam expanders have been designed for use with HeNe lasers but they are also useful for any laser working in the visible part of the spectrum (400 – 700nm).

- Laser beam expanders are made of lenses attached together without using glue (air-gap). Designed to use with high powered lasers.
- These beam expanders are light weight and short bodied and because they are Galileo type design, it is simple with little aberration and correction.
- The visible type can be mounted directly with any HeNe laser.



Outline Drawing (in mm)

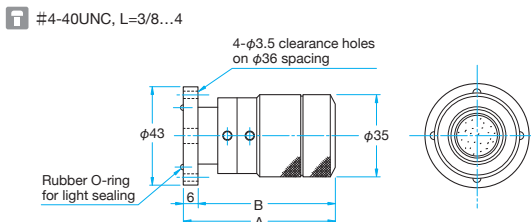

Guide

- ▶ For wavelength or magnification which is not shown on this catalog, please ask our International Sales Division.
- ▶ Beam expander holder with tilt and fine adjustments is available (LBEL-H). [Reference](#) D043

Attention

- ▶ Make sure that the beam expander is well aligned with the laser light axis. If the beam expander is inclining, the output light will also be inclined.
- ▶ It is not possible to obtain a decreased beam diameter by using the beam expander on the opposite side. Use it properly to obtain an adequate optical solution.
- ▶ The light may not be collimated when it become divergent or convergent.

Typical Laser for He-Ne (400 – 700nm)

Primary material: Aluminum
Finish: Black Anodized

Part Number	Expansion ratio	Barrel length A [mm]	B [mm]	Input aperture [mm]	Laser Damage Threshold* [J/cm ²]	Weight [kg]
LBEL-3	3	62.9	56.9	φ3.8	4	0.12
LBEL-5	5	61.9	55.9	φ2.7	4	0.12
LBEL-10	10	127.9	121.9	φ1.7	4	0.18

* Laser pulse width 10ns, repetition frequency 20Hz

Typical Laser for LD (780 – 830nm)

Primary material: Aluminum
Finish: Black Anodized

Part Number	Expansion ratio	Barrel length A [mm]	B [mm]	Input aperture [mm]	Laser Damage Threshold* [J/cm ²]	Weight [kg]
LBEL-3L	3	63.3	57.3	φ3.8	4	0.12
LBEL-5L	5	62.3	56.3	φ2.7	4	0.12
LBEL-10L	10	127.9	122.8	φ1.7	4	0.18

* Laser pulse width 10ns, repetition frequency 20Hz

Typical Laser for YAG (1064nm)

Primary material: Aluminum
Finish: Black Anodized

Part Number	Expansion ratio	Barrel length A [mm]	B [mm]	Input aperture [mm]	Laser Damage Threshold* [J/cm ²]	Weight [kg]
LBEL-3Y	3	63.73	57.8	φ3.8	4	0.12
LBEL-5Y	5	63.8	57.8	φ2.7	4	0.12
LBEL-10Y	10	128.9	123.8	φ1.7	4	0.18

* Laser pulse width 10ns, repetition frequency 20Hz

Compatible Optic Mounts

LBEL-3H, -5H, -10H / LBEL-3LH, 5LH, -10LH / LBEL-3YH, -5YH, -10YH