

LED lighting instructions

Type	Bar light source
Model	BTL-32225X-2P
Color	White
Wave length/Color temp	6500-7000K
Input voltage	24 V
Current consumption (max)	0.7 A
Power consumption (max)	18 W
Brightness (refer value)	White:160~230Klux
Weight	335.8 g (±10%)
Aging shell temperature (refer value)	45 °C (±10%)
Input connector	SMR-03V-B
Input port	1.LED+ 2.NC 3.LED-
Cooling method	Natural air cooling
Service life	The attenuation of red for 60,000 hours does not exceed 50%, white and blue for 30,000 hours does not exceed 50%
Using environment	Temp 0 ~ 40 °C Humidity 20 ~ 85% RH (with no condensation)
Storage environment	Temp -20 ~ 60 °C Humidity 20 ~ 85% RH (with no condensation)
Dimension	Refer to the product dimension drawing
Remark	

1

2

3

4

5

A


B

C


D

E

UNIT: mm

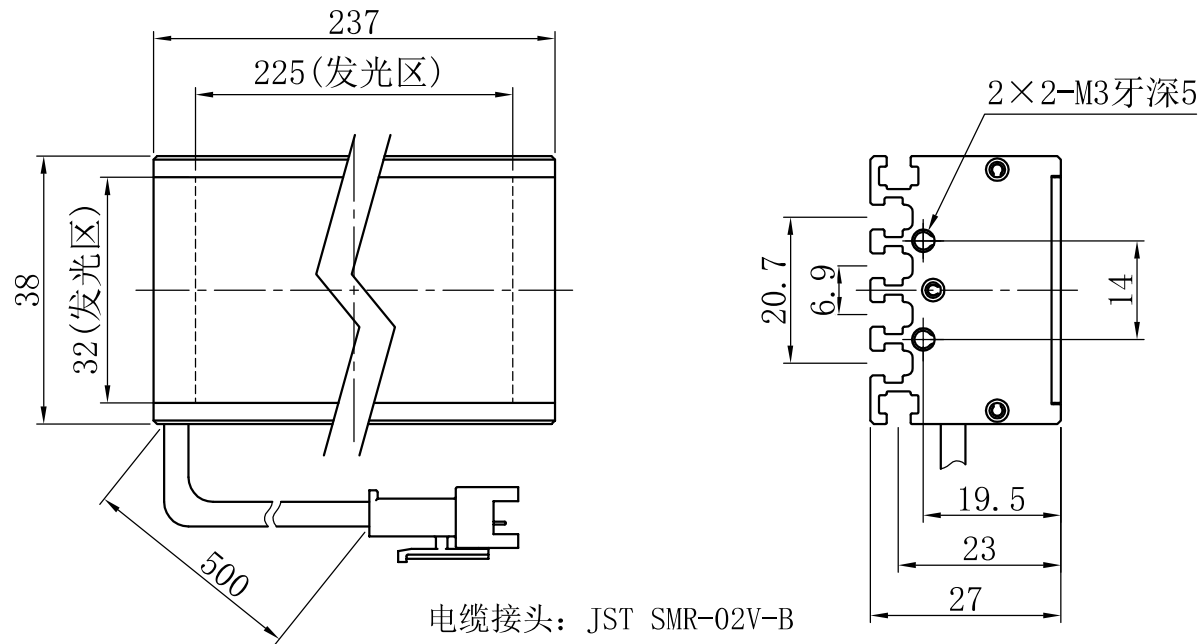

M3螺母, 安装用



型号

BTL-32225X-2P

产品安装尺寸图

尺寸图版本号

1.0

品名

条形光源

日期

2021-5-11

比例

1:1

重量

HOURS
www.hours-web.com