



接口相关图

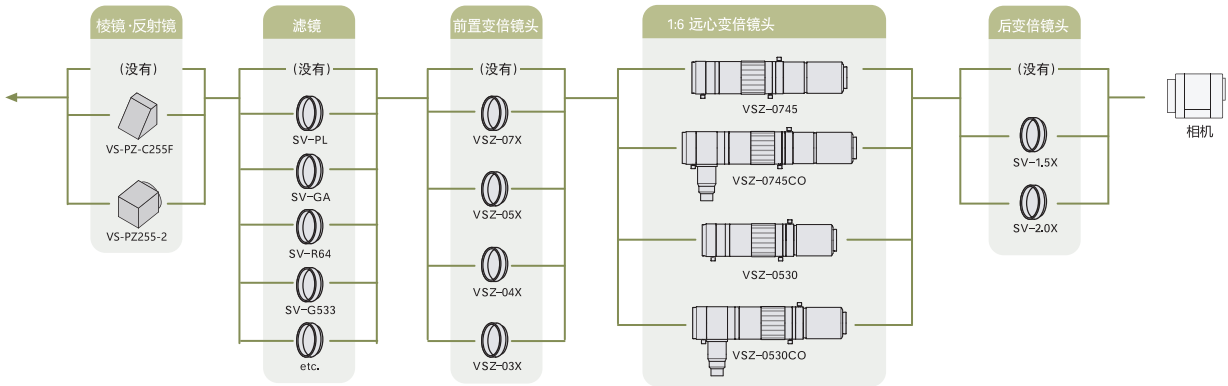


1:8 低倍变倍镜头

VSZ-M0108S

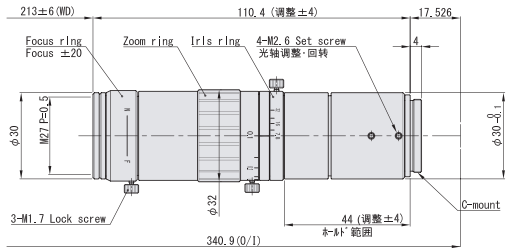

规格		VSZ-M0108S		
可变倍率范围		0.1x ~ 0.8x		
光学倍率		0.1x	0.4x	0.8x
视野 (VxH)	2/3"	—		
	1/2"	48.0 x 64.0 mm	12.0 x 16.0 mm	6.0 x 8.0 mm
	1/3"	36.0 x 48.0 mm	9.0 x 12.0 mm	4.5 x 6.0 mm
WD		213.0 mm ±6		
物像间距离O/I		340.9 mm		
实效F *光圈全开		7.8	7.8	8.8
NA		0.006	0.026	0.045
景深 允许错误值±0.04mm		62.4 mm	3.9 mm	1.1 mm
TV失真		-0.16 %	0.03 %	0.05 %
适合芯片		1/2"		
滤镜口径		M 27 P = 0.5		
重量		134 g		


VSZ-M0324S

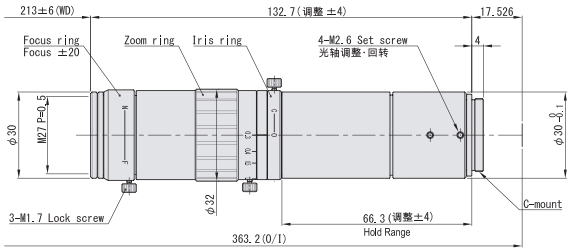

规格		VSZ-M0324S		
可变倍率范围		0.3x ~ 2.4x		
光学倍率		0.3x	1.2x	2.4x
视野 (VxH)	2/3"	—		
	1/2"	16.0 x 21.3 mm	4.0 x 5.3 mm	2.0 x 2.7 mm
	1/3"	12.0 x 16.0 mm	3.0 x 4.0 mm	1.5 x 2.0 mm
WD		213.0 mm ±6		
物像间距离O/I		363.2 mm		
实效F *光圈全开		23.2	24.5	26.0
NA		0.006	0.024	0.046
景深 允许错误值±0.04mm		20.6 mm	1.4 mm	0.4 mm
TV失真		0.02 %	0.05 %	0.04 %
适合芯片		1/2"		
滤镜口径		M 27 P = 0.5		
重量		165 g		


1:10 变倍镜头

VSZ-10100

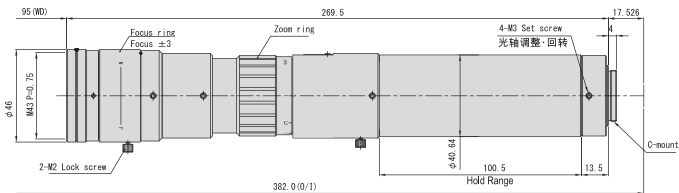

规格		VSZ-10100		
可变倍率范围		1.0x ~ 10.0x		
光学倍率		1.0x	4.0x	10.0x
视野 (VxH)	2/3"	7.1 x 8.4 mm	1.8 x 2.1 mm	0.7 x 0.8 mm
	1/2"	4.8 x 6.4 mm	1.2 x 1.6 mm	0.5 x 0.6 mm
	1/3"	3.6 x 4.8 mm	0.9 x 1.2 mm	0.4 x 0.5 mm
WD		95.0 mm		
物像间距离O/I		382.0 mm		
实效F *光圈全开		13.3	15.4	36.7
NA		0.038	0.130	0.136
景深 允许错误值±0.04mm		1.1 mm	0.08 mm	0.03 mm
TV失真		0.16 %	-0.01 %	0.02 %
适合芯片		2/3"		
滤镜口径		M 43 P = 0.75		
重量		820 g		

VSZ-10100COL

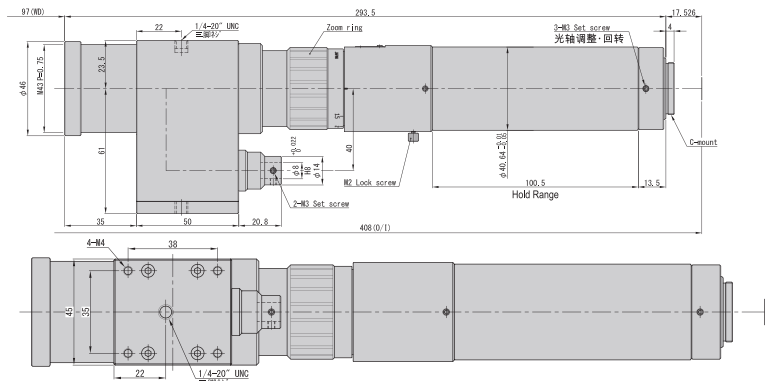

规格		VSZ-10100COL		
可变倍率范围		1.0x ~ 10.0x		
光学倍率		1.0x	4.0x	10.0x
视野 (VxH)	2/3"	7.1 x 8.4 mm	1.8 x 2.1 mm	0.7 x 0.8 mm
	1/2"	4.8 x 6.4 mm	1.2 x 1.6 mm	0.5 x 0.6 mm
	1/3"	3.6 x 4.8 mm	0.9 x 1.2 mm	0.4 x 0.5 mm
WD		97.0 mm		
物像间距离O/I		408.0 mm		
实效F *光圈全开		13.3	15.4	36.7
NA		0.038	0.130	0.136
景深 允许错误值±0.04mm		1.1 mm	0.08 mm	0.03 mm
TV失真		0.16 %	-0.01 %	0.02 %
适合芯片		2/3"		
滤镜口径		M 43 P = 0.75		
重量		1210 g		

VSZ 倍率 WD相关图


VSZ 倍率	WD	0.1x	0.3x	0.5x	0.7x	1.0x	1.5x	2.0x	2.5x	3.0x	4.0x	4.5x	5.0x	6.0x	7.0x	8.0x	9.0x	10.0x
VSZ-0745(CO)	100mm																	
VSZ-0530(CO)	100mm																	
VSZ-M0108S	213mm																	
VSZ-M0324S	213mm																	
VSZ-10100	95mm																	
VSZ-10100COL	97mm																	

VSZ-MR Series 2/3" 1/1.8"


长工作距离100mm，可调焦±3mm。
2相和5相马达镜头可供选择，详情请联系我们业务员。




配线图

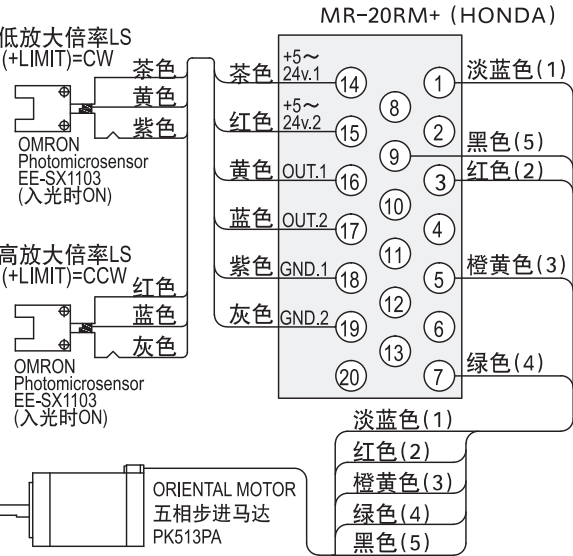


VSZ-0530-MR

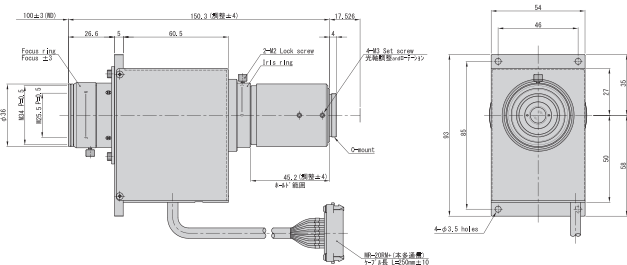


VSZ-0530CO-MR

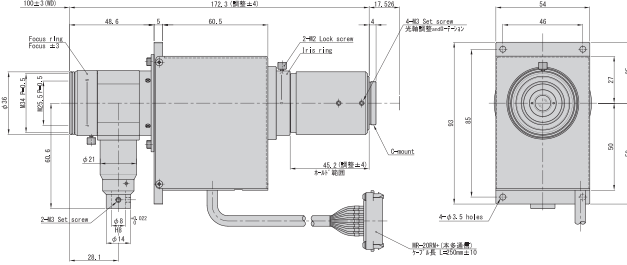

VSZ-0745-MR

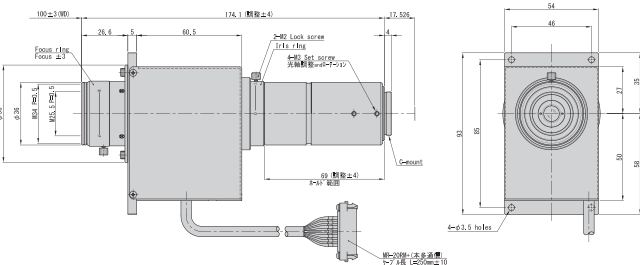

VSZ-0745CO-MR

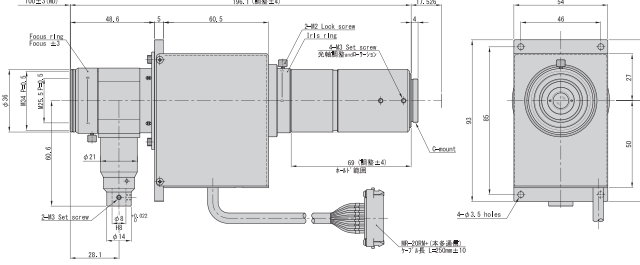

规格	VSZ-0530-MR			VSZ-0530CO-MR			VSZ-0745-MR			VSZ-0745CO-MR		
可变倍率范围	0.47x ~ 3.0x			0.47x ~ 3.0x			0.7x ~ 4.5x			0.7x ~ 4.5x		
光学倍率	0.47x	1.2x	3.0x	0.47x	1.2x	3.0x	0.7x	1.8x	4.5x	0.7x	1.8x	4.5x
视野 (VxH)	2/3"	11.5 x 15.1 mm	4.5 x 5.9 mm	1.8 x 2.4 mm	11.5 x 15.1 mm	4.5 x 5.9 mm	1.8 x 2.4 mm	10.1 x 12.0 mm	3.9 x 4.7 mm	1.6 x 1.9 mm	10.1 x 12.0 mm	3.9 x 4.7 mm
	1/2"	10.2 x 13.6 mm	4.0 x 5.3 mm	1.6 x 2.1 mm	10.2 x 13.6 mm	4.0 x 5.3 mm	1.6 x 2.1 mm	6.9 x 9.1 mm	2.7 x 3.6 mm	1.1 x 1.4 mm	6.9 x 9.1 mm	2.7 x 3.6 mm
	1/3"	7.7 x 10.2 mm	3.0 x 4.0 mm	1.2 x 1.6 mm	7.7 x 10.2 mm	3.0 x 4.0 mm	1.2 x 1.6 mm	5.1 x 6.9 mm	2.0 x 2.7 mm	0.8 x 1.1 mm	5.1 x 6.9 mm	2.0 x 2.7 mm
WD	100.0 mm ±3			100.0 mm ±3			100.0 mm ±3			100.0 mm ±3		
物像间距离O/I	267.8 mm			289.8 mm			291.6 mm			313.6 mm		
实效F*光圈全开	6.9	9.3	19.8	6.9	9.3	19.8	10.3	13.8	29.0	10.3	13.8	29.0
NA	0.034	0.065	0.076	0.034	0.065	0.076	0.034	0.065	0.078	0.034	0.065	0.078
景深 允许轴乱差±0.04mm	2.5 mm	0.5 mm	0.2 mm	2.5 mm	0.5 mm	0.2 mm	1.7 mm	0.3 mm	0.1 mm	1.7 mm	0.3 mm	0.1 mm
TV失真	-0.09 %	0.12 %	0.11 %	-0.09 %	0.12 %	0.11 %	-0.03 %	0.09 %	0.08 %	-0.03 %	0.09 %	0.08 %
适合芯片	1/1.8"			1/1.8"			2/3"			2/3"		
照明方式	—			Built-in			—			Built-in		
重量	560 g			—			590 g			680 g		