

ITC-TG

RJ45 STANDARD 10 GIGABIT ETHERNET CABLE

The RJ45 Standard 10 Gigabit Ethernet Cable can be used for data transmission of RJ45 10 Gigabit Ethernet interface cameras, and is available in a variety of lengths.



Applicable Camera:


Hikrobot RJ45 10 Gigabit Ethernet Interface Industrial Camera

Order Models:


- 3m RJ45 Standard 10 Gigabit Ethernet Cable: ITC-TG-3m
- 5m RJ45 Standard 10 Gigabit Ethernet Cable: ITC-TG-5m
- 10m RJ45 Standard 10 Gigabit Ethernet Cable: ITC-TG-10m

Dimension:

ITC-TG-3m:

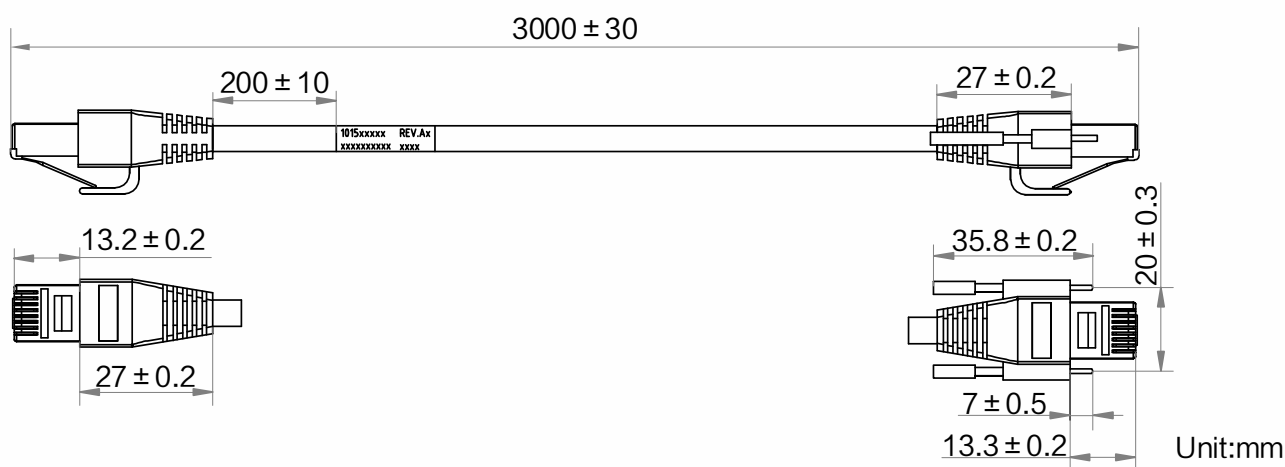

ITC-TG-5/10m:

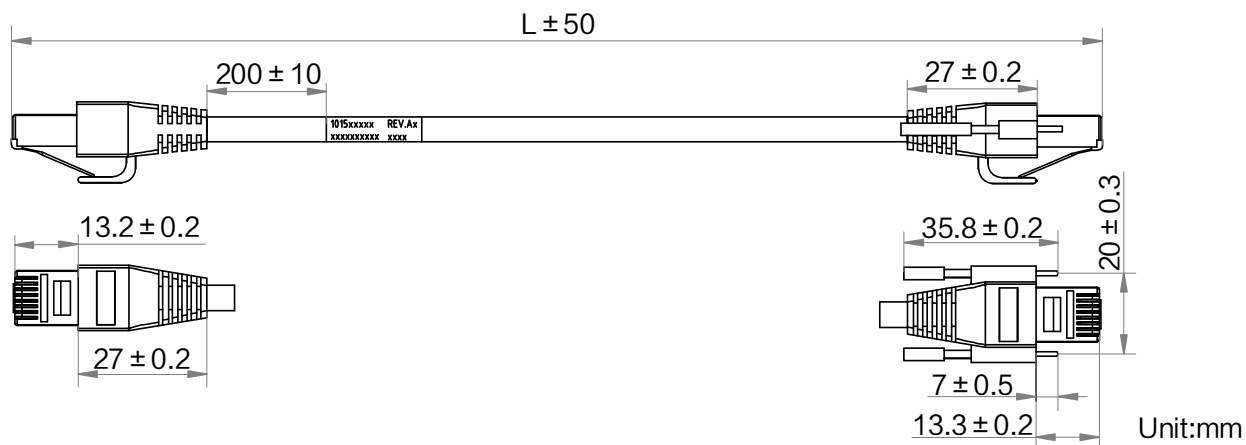

Specification

Specifications	Model	ITC-TG
	RJ45 Standard 10 Gigabit Ethernet Cable	
Physical specification		
End A connector	RJ45 (with locking stud)	
End B connector	RJ45	
Cable diameter	7.0 mm	
Length	3/5/10 m	
Cable mechanical	(26 #*1P+AL)*4C+AB	
Jacket	PVC	
Cable color	Black	
Connector durability	>750 cycles	
Min. bending radius	84 mm	
Applicable scenario	Static scenes	
Electrical specification		
Max. voltage	30 VDC	
Additional information		
Working temperature	-20℃ ~ 75℃	
Certification	RoHS, UL	
Packaging	Individual package	

Read the user manual for the camera including the precautions before connecting the cable to the camera.

ITC-THG

RJ45 HIGH FLEXIBLE 10 GIGABIT ETHERNET CABLE

The RJ45 High Flexible 10 Gigabit Ethernet Cable can be used for data transmission of RJ45 10 Gigabit Ethernet interface cameras, and is available in a variety of lengths.




Applicable Camera:

Hikrobot RJ45 10 Gigabit Ethernet Interface Industrial Camera

Order Models:

- 3m RJ45 High Flexible 10 Gigabit Ethernet Cable: ITC-THG-3m
- 5m RJ45 High Flexible 10 Gigabit Ethernet Cable: ITC-THG-5m
- 10m RJ45 High Flexible 10 Gigabit Ethernet Cable: ITC-THG-10m

Dimension:

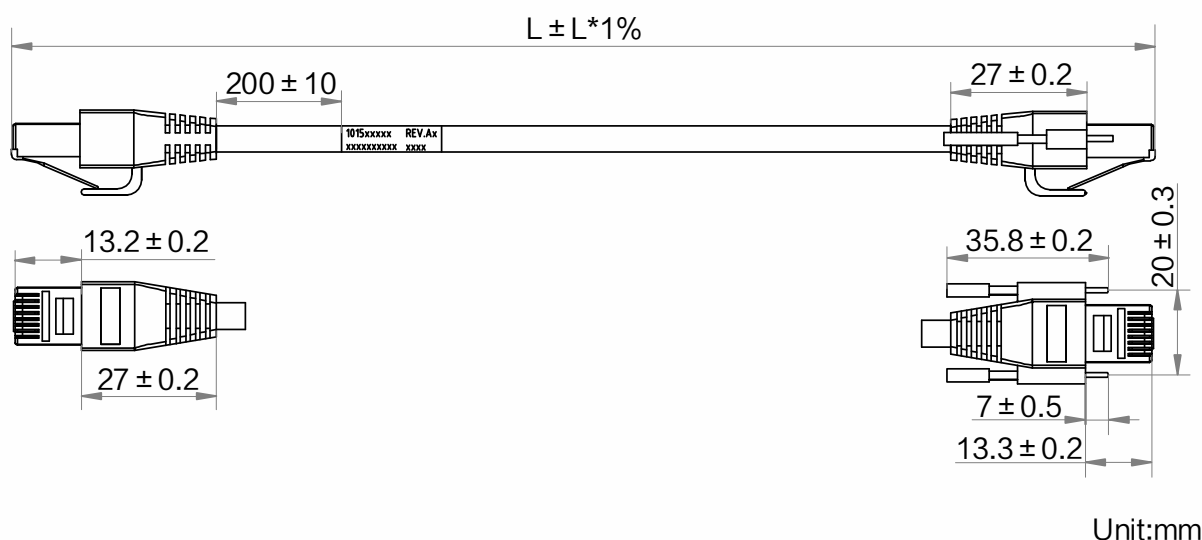

Specification

Specifications	Model	ITC-THG
		RJ45 High Flexible 10 Gigabit Ethernet Cable
Physical specification		
End A connector	RJ45 (with locking stud)	
End B connector	RJ45	
Cable diameter	7.0 mm	
Length	3/5/10 m	
Cable mechanical	(26#*1P+AL)*4C+AB	
Jacket	PVC	
Cable color	Black	
Connector durability	>750 cycles	
Min. bending radius	84 mm	
Applicable scenario	Drag chain	
Max. U-type bending cycles	5 million times	
Electrical specification		
Max. voltage	30 VDC	
Additional information		
Working temperature	-20℃ ~ 75℃	
Certification	RoHS, UL	
Packaging	Individual package	

Read the user manual for the camera including the precautions before connecting the cable to the camera.