

Fiber holder to fix bare fibers, spherical lensed fibers, etc.  
Attached to the holder mounting table of the fiber alignment unit.

- The resin clamps have built-in magnetizable set bolts, and gently fasten an optical fiber by the magnetic force of the magnets of these fiber holders.
- Attachment to the fiber alignment unit is a one-touch operation using magnets for easy connection and disconnection.
- Can be attached to the DAU series fiber alignment unit.




### Guide

- ▶ FHMf-125/\*\*\*L (for fiber alignment left unit) and FHMf-125/\*\*\*R (for fiber alignment right unit) are available. In addition, several types of jacket diameters (fiber coating diameter) are available.
- ▶ For sizes and shapes not listed here, please contact our sales department.




### Outline Drawing

FHMf-125/\*\*\*L

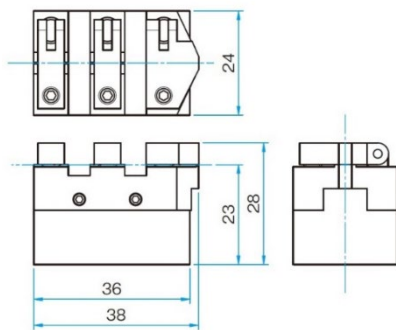

FHMf-125/\*\*\*R

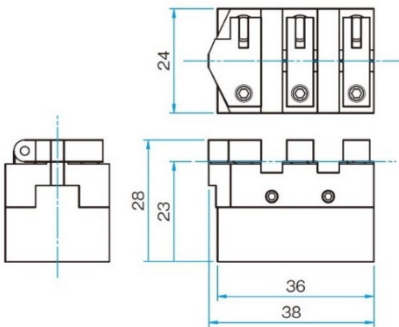

Specifications			
Part Number	FHMf-125/250L	FHMf-125/400L	FHMf-125/900L
(Opposite Model)	FHMf-125/250R	FHMf-125/400R	FHMf-125/900R
Cladding Diameter [μm]	125	125	125
Jacket Diameter [μm]	250	400	900
Primary material	Aluminum	Aluminum	Aluminium
Finish	Black Anodized	Black Anodized	Black Anodized
Weight [kg]	0.052	0.052	0.052